

# CubiScan<sup>®</sup> 125

## *Applications/Benefits*

### *Warehousing and Distribution*

- Designed specifically to measure and weigh small parts, irregular shaped, and boxed items
- Designed to work with and interface to warehouse management system software
- Facilitates storage location selection, order picking, carton selection, and shipment planning
- Compatible with case packing/load optimization software packages
- Eliminates manual data entry and protects data integrity
- Provides data useful for retail shelf-space allocation (planogramming)

### *Other*

- Easy to use Windows<sup>®</sup> based software interface
- Real-time or batch-mode data transfer to host system available
- Mobile system moves anywhere in the warehouse or pick isles
- Dimensional and weight data available in metric and/or imperial units
- Uses sensing technology which is safe for both operators and package contents





# CubiScan® 125

## Specifications


Physical Specifications		
Length	42 in (1,067 mm)	
Width	64 in (1,626 mm)	
Height	52 in (1,321 mm)	
Weight	130 lbs (59 kg)	
Performance Specifications		
Measurement Range	boxed items	irregular items
Length	0.5 in (13 mm) to 24 in (610 mm)	0.1 in (2 mm) to 18.0 in (450 mm)
Width	0.5 in (13 mm) to 30 in (762 mm)	0.1 in (2 mm) to 18.0 in (450 mm)
Height	0.5 in (13 mm) to 36 in (914 mm)	0.1 in (2 mm) to 12.0 in (305 mm)
Measurement Increment	0.1 in (2 mm)	0.05 in (1 mm)
Measurement Time	< 3 seconds	< 5 seconds
Weight Capacity	0.005 to 50 lbs (0.002 to 25 kg)	
Weight Increment	0.005 lbs (0.002 kg)	
Object Colors	All Colors	Opaque
Other		
Measuring Sensor	Infrared light beam and ultrasonic	
Weight Sensor	Three load cells	
Connectivity	Serial (1), Ethernet (1), USB (1)	
User Interface	Integrated touch screen display/ QBIT™ software	
Minimum PC Specifications	Windows 7/XP/95/98/NT/2000, Pentium II processor, 20 megabytes of disk space, screen resolution setting of 800 X 600	
Power Requirements	95 - 250 VAC, 50 - 60 Hz	
Operating Temperature	32° - 104° F (0° to 40° C)	
Humidity	0 - 90% non-condensing	
Display	TFT LCD touch screen; Displays L, W, H, weight, unit of measure, 2D and height profile, and diagnostic codes	

The CubiScan 125 is a small static cubing system that uses a combination of sensing technologies to measure and weigh irregular-shaped parts and components as well as boxed items. Small parts and non-cuboidal items are measured with great precision using infrared sensing technology, while larger boxed items are measured with ultrasonic sensors.

The CubiScan 125 is commonly used to improve storage-space planning, carton size selection, repacking, check-weighing and shipment manifesting in medical, pharmaceutical, apparel, hardware, and consumer goods distribution. It has an integrated control panel/display, and outputs to a user-supplied PC. Capacity for boxes/cases is 24 x 24 x 36 inches with a resolution of 0.1 inches; irregular items are at 18 x 18 x 12 inches with a resolution of 0.05 inches. The 125 also includes an integrated, high-accuracy 50 x 0.005 lbs scale.

Each unit has one active serial communication port, one Ethernet port, and one USB port. Proprietary interface software, called Qbit™, accompanies the system and allows for menu-driven operator control, data storage/transfer and diagnostics. A mobile cart and useful accessories such as a portable power supply, handheld barcode scanner and label printers are available to create a completely mobile cubing, weighing and identification work station.

The CubiScan 125 combines powerful sensing technologies to create a flexible and economical solution for today's most demanding cubing and weighing applications.

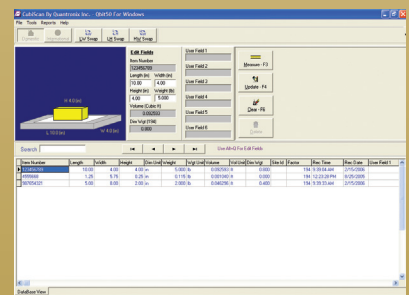

Data files are created, managed, and made available for transfer to a host data processing system.

CubiScan® and the Quantronix logo are registered trademarks of Quantronix, Inc.

Scanning New Dimensions™, Qbit™, QbitWIN™, and The FreightWeigh System™ are trademarks of Quantronix, Inc. Windows® is a registered trademark of Microsoft Corporation.

CubiScan software and firmware are protected by international and domestic copyrights.

CubiScan 100 measurement products incorporate technology protected by U.S. Patent No. 5,422,861 and foreign patents.

CubiScan 150 measurement products are protected by one or more of U.S. Patents 5,422,861 and D490,328 and foreign patents. Other U.S. and international patents are pending.

CubiScan 1000-VS measurement products incorporate technology protected by U.S. Patent No. 7,277,187 and foreign patents.

This document Copyright© 2011 by Quantronix, Inc. All rights reserved.

**CUBISCAN**  
CUBING & WEIGHING SYSTEMS BY QUANTRONIX

380 South 200 West • P.O. Box 929 • Farmington, Utah • 84025 • USA  
1-800-488-CUBE • (801) 451-7000 • Fax: (801) 451-0502  
e-mail: info@cubiscan.com • www.cubiscan.com